

E1240SA6N6A.ALWE000



- Energy savings up to 33% (12W for replacing T8 18W X 1 fixture)
- One-piece housing design with uniform lit appearance
- Continuous lighting effect by minimal end-cap dimensions
- Flexible bracket mount positions & max. 12m interconnectable design
- Application
 - Cove lighting, Under-cabinet applications


Specification



Type	LED Batten	Beam angle (°)	160
Equivalent to (W)	T8 18W x1	Color temperature (K)	4,000
Wattage (W)	12	Color rendering index (Ra)	83
Lumen output (lm)	1,200	Operating temperature (°C)	-20 ~ +40
Efficacy (lm/W)	100	Average lifetime (hrs)	30,000 (L70B10)
Voltage (V AC)	100 ~ 240	Dimensions (DxWxH, mm)	585 x 35.4 x 44.4
Frequency (Hz)	50/60	Weight (g)	250
Input current (mA)	Max. 60	IP Level	20
Power factor	> 0.8	IK Level	-
THD (%)	< 9.9	Glow wire test (°C)	650
Surge Protection (kV)	< 0.9	Dimmable	No
		Certification	CE, ENEC

※ Specifications are subject to change without notice

Dimensions

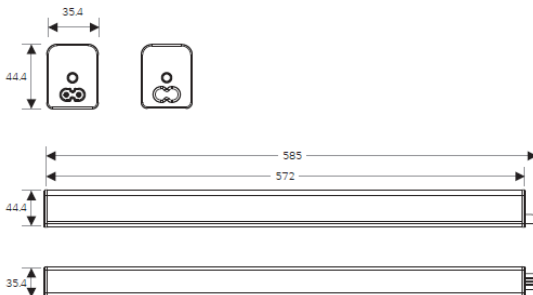

Photometric Data

