




Wandleuchten | 220-240 V | topLED 4 W 1050 mA | CRI 90  
7978



Technische Daten	
Designer	Davide Oppizzi
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	Flood
Light emission direction	upward
Lampenleistung	4 W
Lichtstrom (Lichtquelle)	363 lm
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tonalità	3000 K
Farbwiedergabeindex	90 Ra
Isolierklasse	1
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Ja
Drehbarkeit	Ja
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	0,872 Kg

### Oberfläche Gehäuse

Material	Aluminium
Farbe	Schwarz RAL 9005
Bearbeitungstyp	Lackierung

### Oberfläche Diffusor

Material	PC
Farbe	Bernstein

### Oberfläche Fassung

Material	Aluminium
Farbe	Schwarz RAL 9005
Bearbeitungstyp	Lackierung

Wandleuchten | 220-240 V | topLED 4 W 1050 mA | CRI 90  
7978

Single emission wall lights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 363 lm, with a 90.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0,872 kg. The power supply driver is included in the delivery.


The total absorbed power is 4 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	42 %
Lichtstrom (Lichtquelle)	363 lm
Leuchten Lichtstrom	156.07 lm
Consumption	4 W
Leuchten Lichtausbeute	39 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 28

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	69°

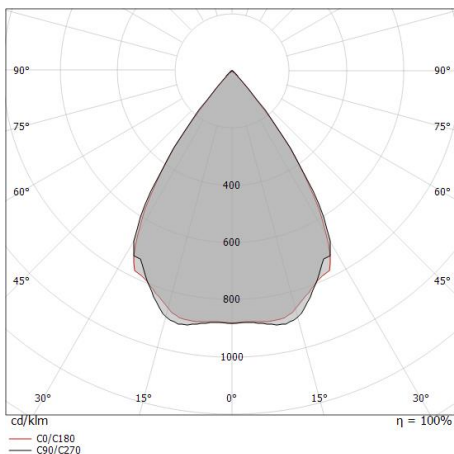

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.70 0.69	E(0°) 551 E(C90) 157 E(C0) 155
1.0	1.40 1.38	E(0°) 138 E(C90) 39 E(C0) 39
1.5	2.09 2.08	E(0°) 61 E(C90) 17 E(C0) 17
2.0	2.79 2.77	E(0°) 34 E(C90) 10 E(C0) 10
2.5	3.49 3.46	E(0°) 22 E(C90) 6 E(C0) 6
3.0	4.19 4.15	E(0°) 15 E(C90) 4 E(C0) 4


— C0/C180 (Half-peak divergence: 69.4°)  
— C90/C270 (Half-peak divergence: 69.8°)



Diffusor

**Code**

KIT0036



Diffusor

**Code**

KIT0056



Diffusor

**Code**

KIT0058