




Pendelleuchte | 220-240 V | topLED 92 W 1550 mA | DALI | CRI 90  
7650



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	downward and upward
Lampenleistung	92 W
Lichtstrom (Lichtquelle)	13961 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tonalität	3000 K
Farbwiedergabeindex	90 Ra
Isolierklasse	1
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Leuchte dimmbar	DALI
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	16 Kg

Oberfläche Gehäuse	
Material	Eisen
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Lackierung

Oberfläche Diffusor	
Material	PE
Farbe	neutral

Oberfläche Fassung	
Material	Eisen
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | topLED 92 W 1550 mA | DALI | CRI 90  
**7650**

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 126 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 13961 lm, with a 151.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 16 kg. The power supply driver is included in the delivery.


The total absorbed power is 92 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	80 %
Lichtstrom (Lichtquelle)	13961 lm
Leuchten Lichtstrom	11265 lm
Consumption	98 W
Leuchten Lichtausbeute	114 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 22

OPTICAL	
Light distribution simmetry	Symmetrical
Optica C0/C180	135°

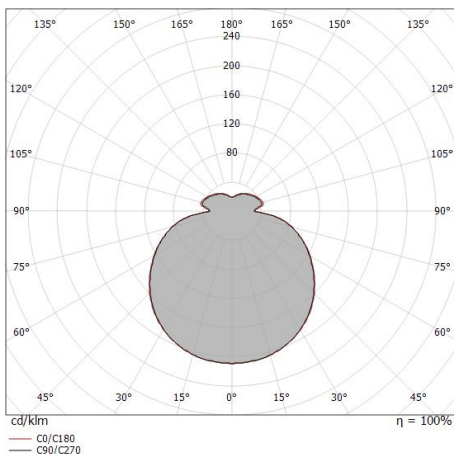


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	2.40 2.46	E(0°) 9429 E(C90) 268 E(C0) 251
1.0	4.80 4.93	E(0°) 2357 E(C90) 67 E(C0) 63
1.5	7.21 7.39	E(0°) 1048 E(C90) 30 E(C0) 28
2.0	9.61 9.85	E(0°) 589 E(C90) 17 E(C0) 16
2.5	12.01 12.31	E(0°) 377 E(C90) 11 E(C0) 10
3.0	14.41 14.78	E(0°) 262 E(C90) 7 E(C0) 7

— C0/C180 (Half-peak divergence: 135.8°)  
 — C90/C270 (Half-peak divergence: 134.8°)



Saturn\_P | Pendant Luminaires | Accessories  
**7650**



Dimmer  
Bluetooth, 220-240V

**Code**  
KIT0079