

HB-2X2-M

~25° medium beam optimized for CREE XP-L
and XM-L


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	8.5 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	9.2 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ










MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
HB-2X2-M	Multi-lens	PMMA	clear

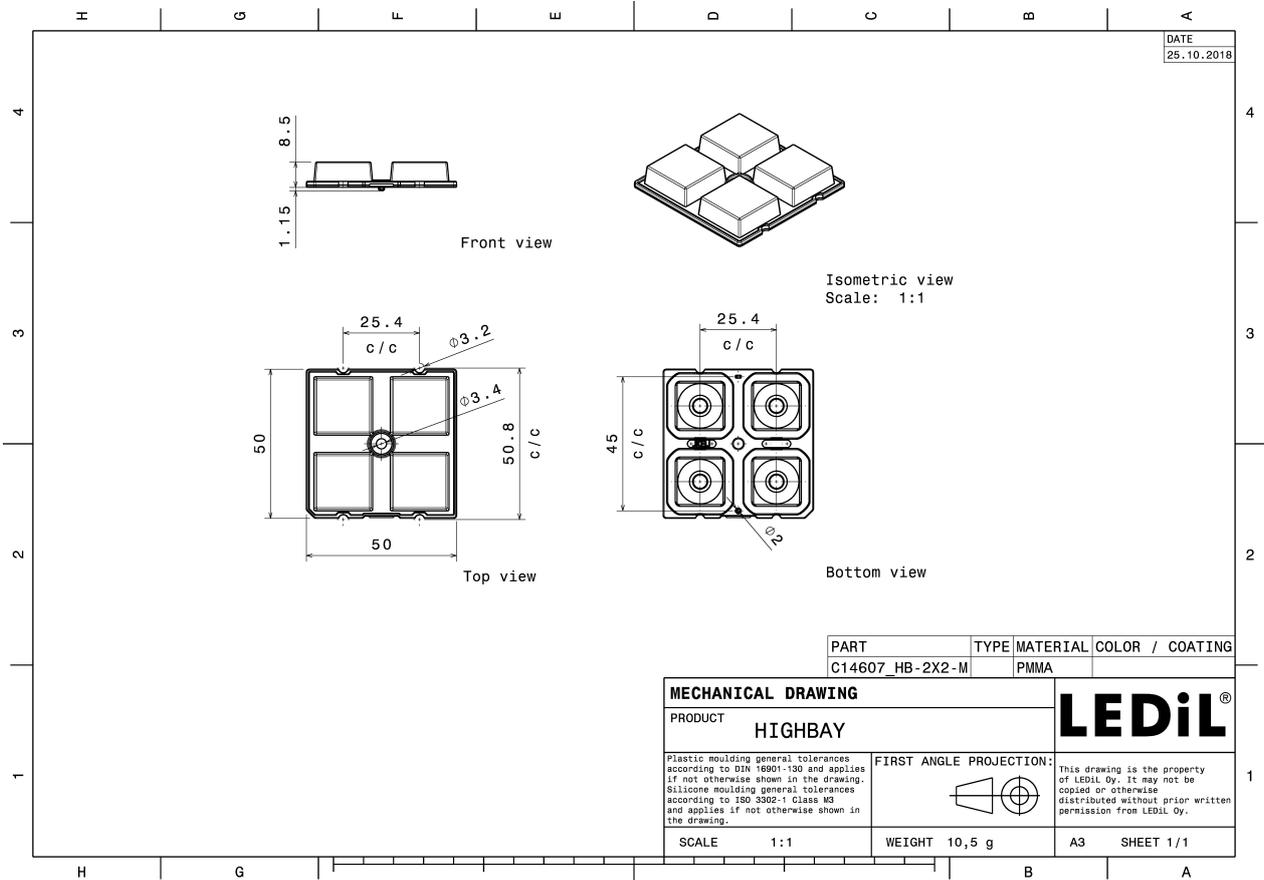


PHOTOMETRIC DATA (MEASURED):
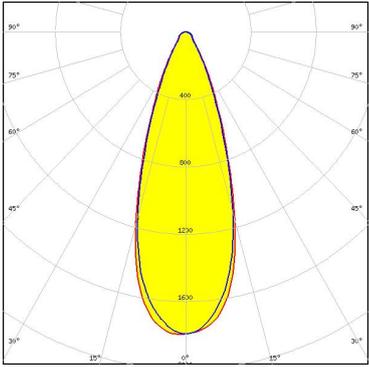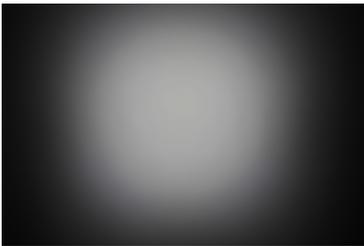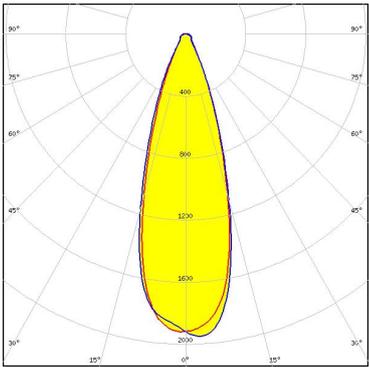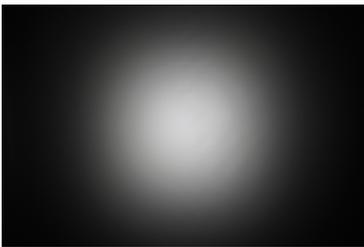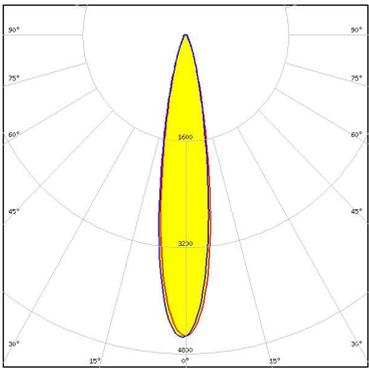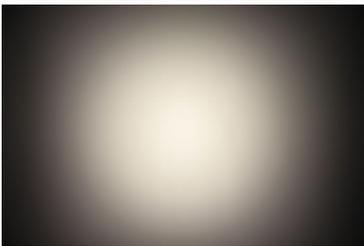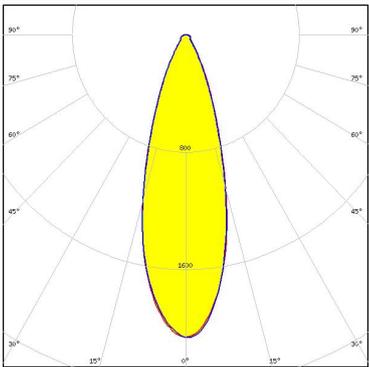
<p> bridgelux</p> <p>LED Bridgelux SMD 5050 FWHM 36.0° Efficiency 94 % Peak intensity 1.800 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p> CREE</p> <p>LED XD16 FWHM 33.0° Efficiency 94 % Peak intensity 2.000 cd/lm LEDs/each optic 4 Light colour White Required components:</p>		
<p> CREE</p> <p>LED XD16 FWHM 19.0° Efficiency 90 % Peak intensity 4.600 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p> CREE</p> <p>LED XM-L FWHM 32.0° Efficiency 93 % Peak intensity 2.040 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):



CREE

LED XM-L2
 FWHM 32.0°
 Efficiency 92 %
 Peak intensity 2.112 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

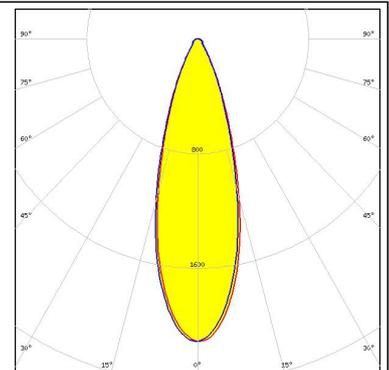



CREE

LED XP-G2
 FWHM 25.0°
 Efficiency 0 %
 Peak intensity 3.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

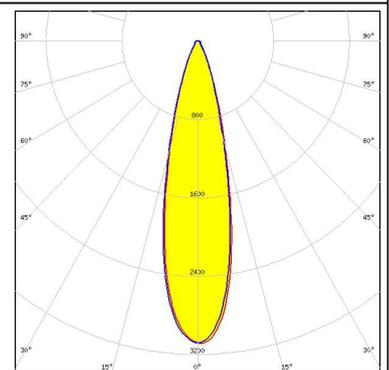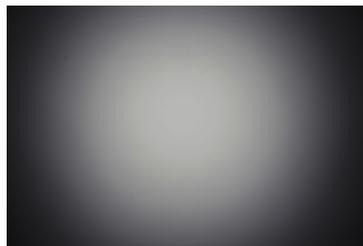


CREE

LED XP-L HD
 FWHM 31.0°
 Efficiency 94 %
 Peak intensity 2.213 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

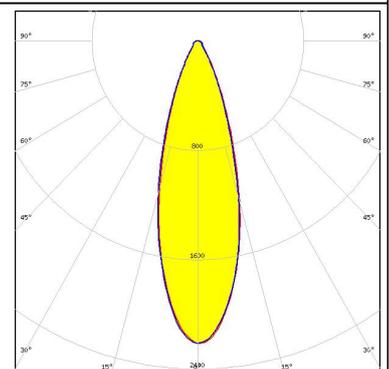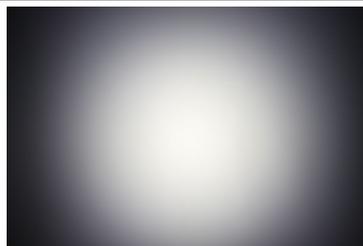

CREE



LED XP-L2
 FWHM 31.0°
 Efficiency 93 %
 Peak intensity 2.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

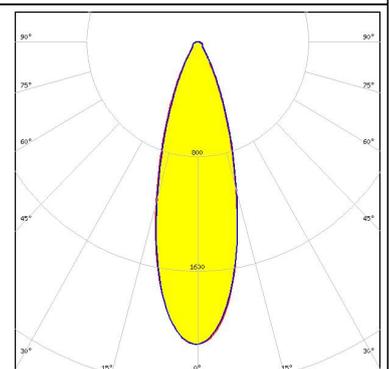

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON 5050
 FWHM 34.0°
 Efficiency 94 %
 Peak intensity 1.950 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

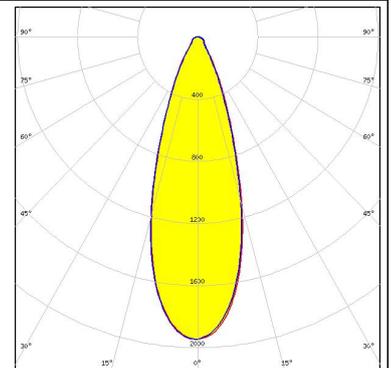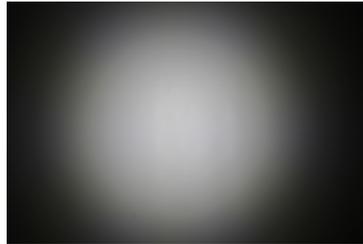



LUMILEDS

LED LUXEON MZ
 FWHM 30.0°
 Efficiency 91 %
 Peak intensity 2.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

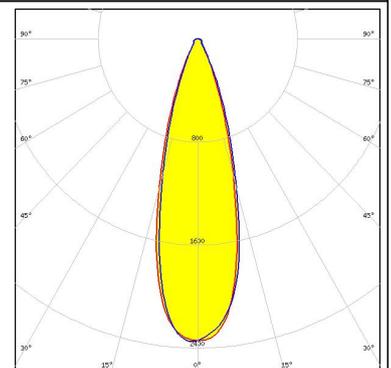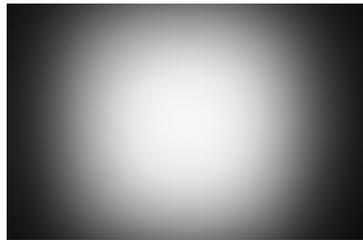



LUMILEDS

LED LUXEON V
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 2.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:






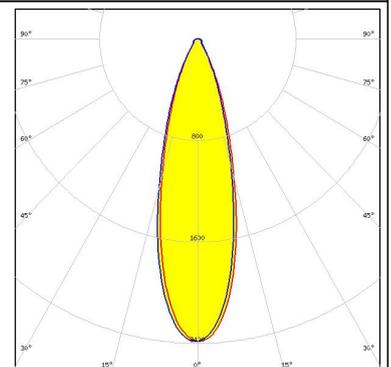
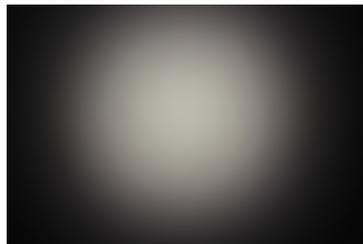


LUMILEDS

LED LUXEON V2
 FWHM 23.0°
 Efficiency 94 %
 Peak intensity 3.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

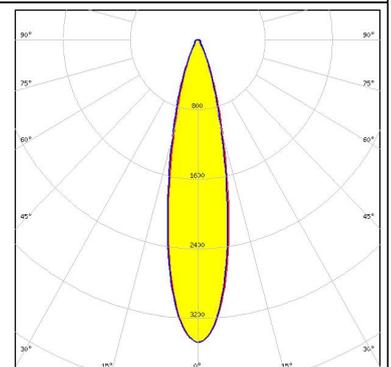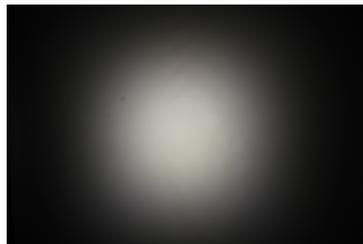


PHOTOMETRIC DATA (MEASURED):
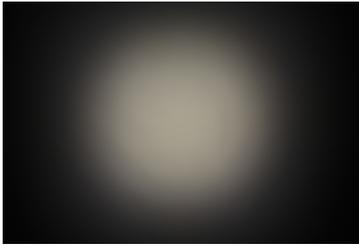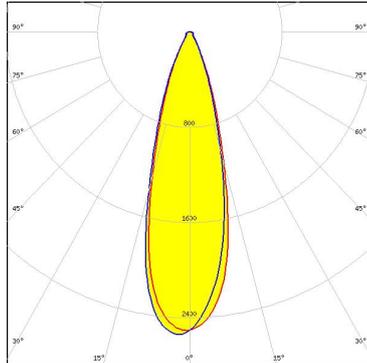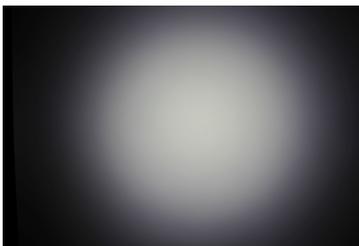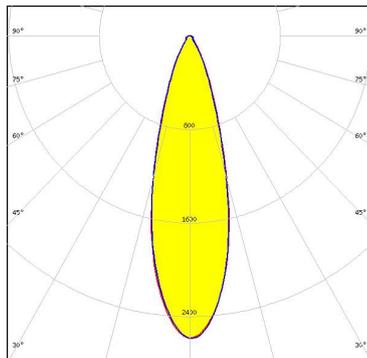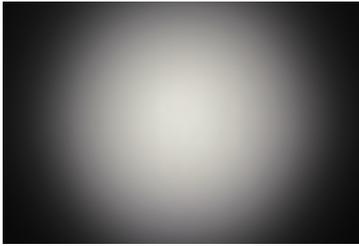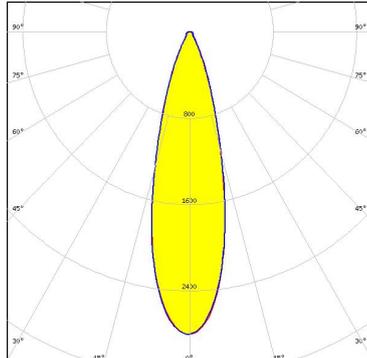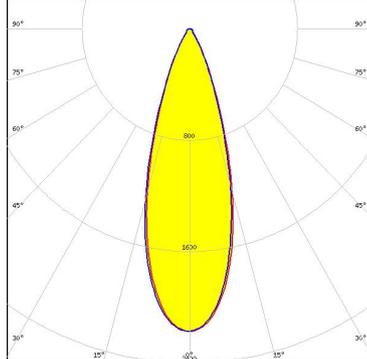
<p>NICHIA</p> <p>LED NVSW219D FWHM 29.0° Efficiency 94 % Peak intensity 2.500 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW319B FWHM 29.0° Efficiency 94 % Peak intensity 2.600 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW3x9A FWHM 28.0° Efficiency 94 % Peak intensity 2.800 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NWSx229A FWHM 33.0° Efficiency 87 % Peak intensity 2.200 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):

OSRAM


LED PrevaLED Brick DC 2x8
 FWHM 23.0°
 Efficiency 91 %
 Peak intensity 3.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

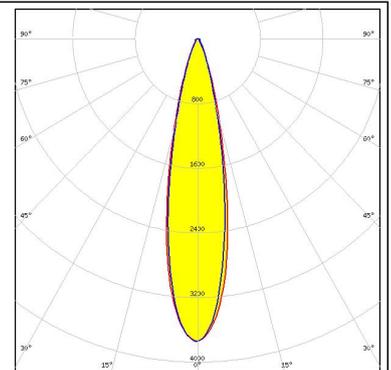

OSRAM

Opto Semiconductors



LED Duris S8
 FWHM 38.0°
 Efficiency 94 %
 Peak intensity 1.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

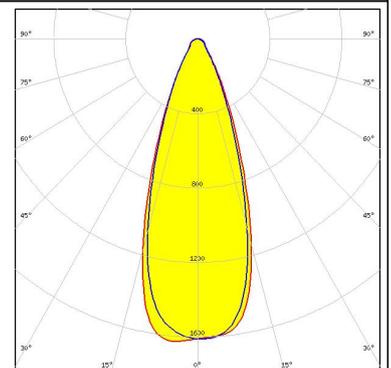

OSRAM



Opto Semiconductors

LED Oslon Square Gen3
 FWHM 23.0°
 Efficiency 91 %
 Peak intensity 3.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

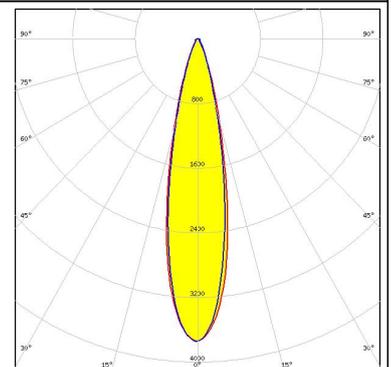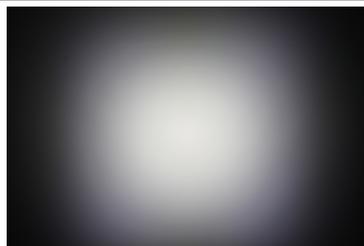

PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4
 FWHM 25.0°
 Efficiency 92 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

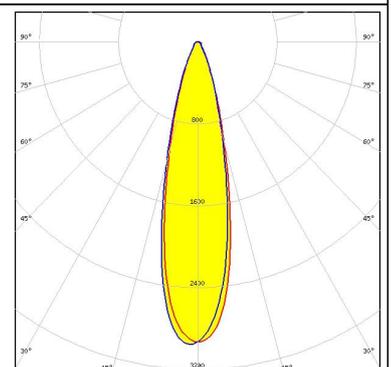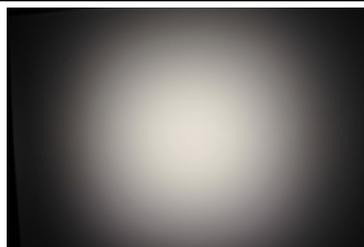

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED HiLOM RH16 (LH351C)
 FWHM 30.0°
 Efficiency 94 %
 Peak intensity 2.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

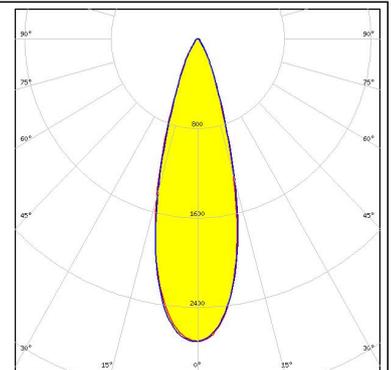


SAMSUNG

LED LH351B
 FWHM 28.0°
 Efficiency 85 %
 Peak intensity 2.720 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

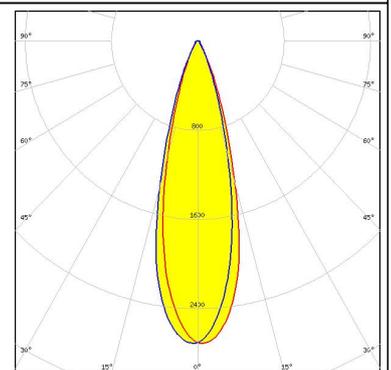


SAMSUNG

LED LH351D
 FWHM 35.0°
 Efficiency 91 %
 Peak intensity 1.900 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



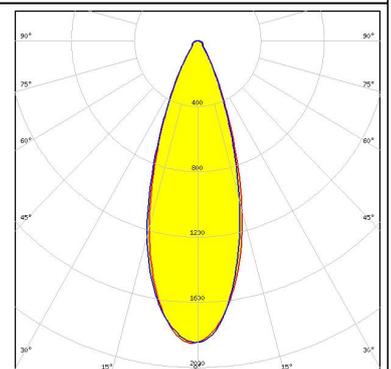


SEOUL SEMICONDUCTOR

LED 2x2 Y22 module - SMJQ-D48W16AA-XX
 FWHM 34.0°
 Efficiency 93 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

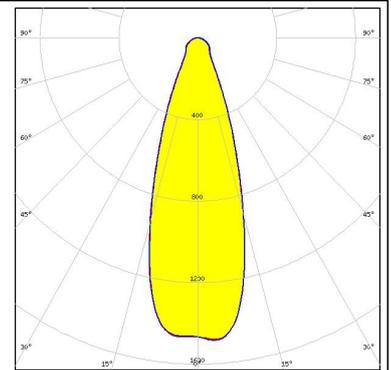


PHOTOMETRIC DATA (MEASURED):
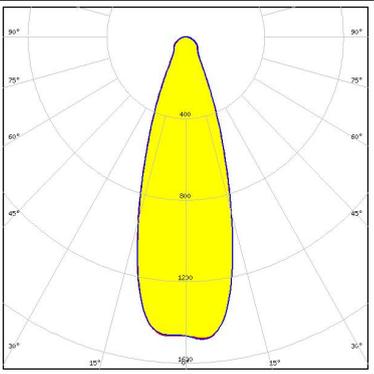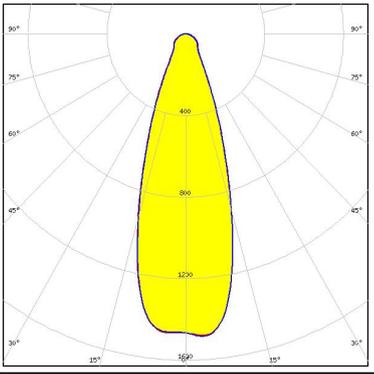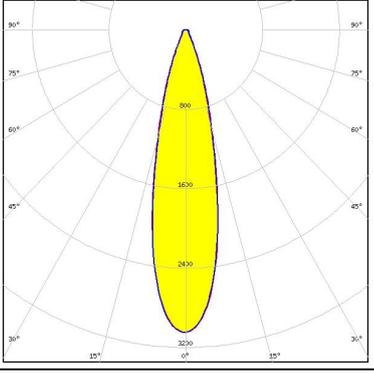
<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y19 FWHM 34.0° Efficiency 93 % Peak intensity 1.500 cd/lm LEDs/each optic 4 Light colour White Required components:</p>		
<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y19 FWHM 34.0° Efficiency 93 % Peak intensity 1.500 cd/lm LEDs/each optic 4 Light colour White Required components:</p>		
<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM 25.0° Efficiency 92 % Peak intensity 3.100 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>TRIDONIC</p> <p>LED RLE 2x4 2000lm HP EXC2 OTD FWHM 23.0° Efficiency 94 % Peak intensity 3.400 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD
 FWHM 23.0°
 Efficiency 94 %
 Peak intensity 3.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

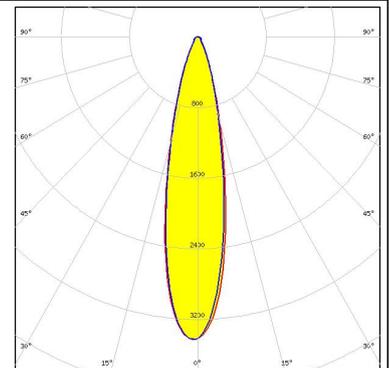


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
 FWHM 24.0°
 Efficiency 94 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

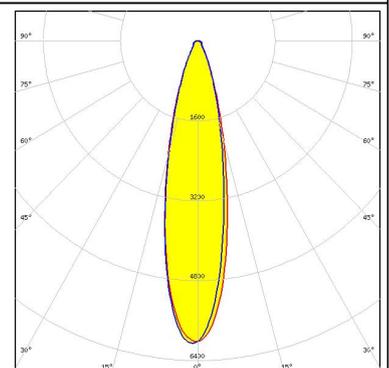


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
 FWHM 24.0°
 Efficiency 94 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

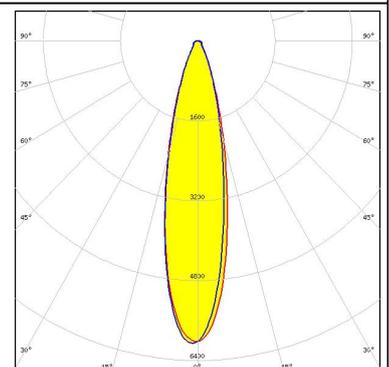

TRIDONIC


LED RLE G1 49x223mm 4000lm xxx EXC OTD
 FWHM 24.0°
 Efficiency 94 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

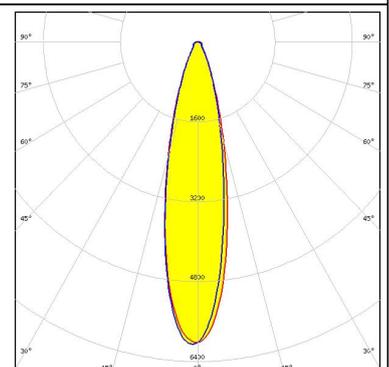

PHOTOMETRIC DATA (MEASURED):

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM 24.0°
Efficiency 94 %
Peak intensity 3.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

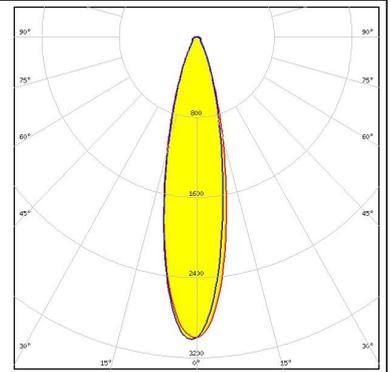


PHOTOMETRIC DATA (SIMULATED):




LED XP-G3
 FWHM 28.0°
 Efficiency 92 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

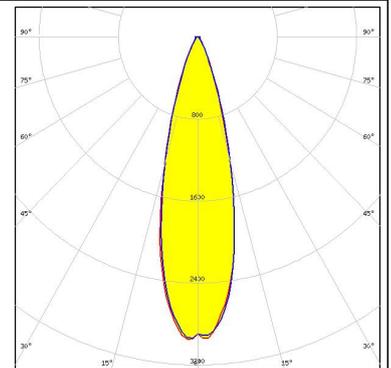


LED LUXEON 3030 2D (Round LES)
 FWHM 21.0°
 Efficiency 91 %
 Peak intensity 4.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

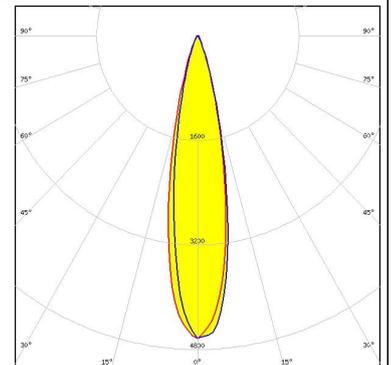

LED LUXEON 3535 2D
 FWHM 22.0°
 Efficiency 92 %
 Peak intensity 4.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

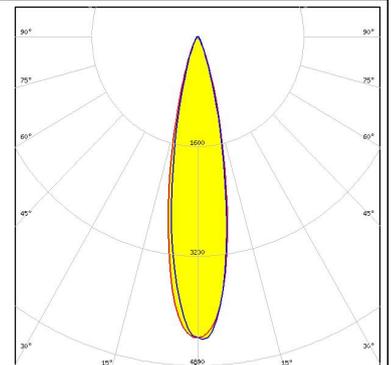


LED OSCONIQ P 3737 (3W version)
 FWHM 29.0°
 Efficiency 93 %
 Peak intensity 2.840 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

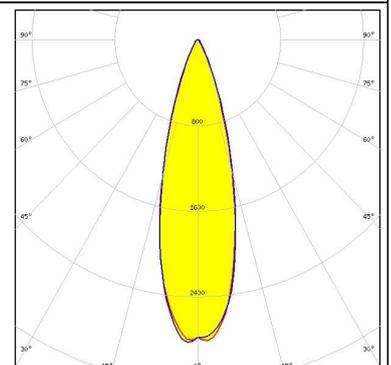

PHOTOMETRIC DATA (SIMULATED):


PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM 28.0°
Efficiency 92 %
Peak intensity 3.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

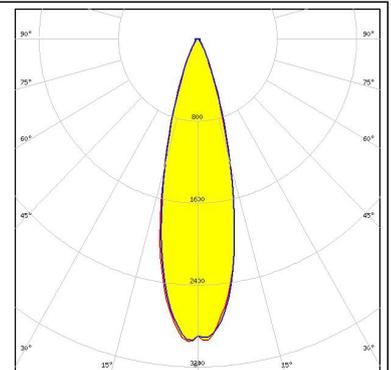

SEOUL SEMICONDUCTOR

LED SEOUL DC 5050 6V
FWHM 34.0°
Efficiency 94 %
Peak intensity 2.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

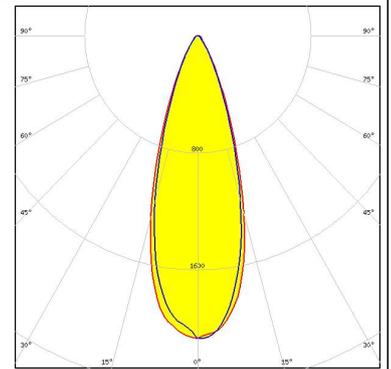

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support
www.ledil.com/where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/where_to_buy