

PRODUCT DATASHEET Boom series

last update 27/9/2012









Product number CA10716_BOOM-S

Family Boom Type RefAssy LED MC-E Color Metal Diameter 22.2 mm Height 13.74 mm Style Hexag Optic Material PC Holder Material Fastening Tape Status On production

Gerber File Available

new tape, 0.2mm thicker

20 degrees

4.120

FWHM

cd/lm

Efficiency

Product number CA10928_BOOM-M

Family Boom Type RefAssy LED MC-E Color Metal Diameter 22.2 mm Height 13.74 mm Style Hexag Optic Material PC Holder Material Fastening Tape Status On production FWHM 36 degrees
Efficiency cd/lm 2.010
Gerber File Available

new tape, 0.2mm thicker

Product number CA10929_BOOM-W

Family Boom RefAssy Type LED MC-E Color Metal Diameter 22.2 mm Height 13.74 mm Style Hexag Optic Material PC Holder Material Fastening Tape

Status

FWHM 54 degrees Efficiency -

cd/lm 1.160
Gerber File Available

new tape, 0.2mm thicker

Product number CA12957_BOOM-XW

On production

Family Boom RefAssy Type LED MC-E Color White Diameter 22.2 mm 13.7 mm Height Style Hexag Optic Material HRPC Holder Material Fastening Tape

Status On production

FWHM 70 degrees Efficiency cd/lm 0.670

Gerber File O.670

Available

July 1st 2015 14:18 Copyright Ledil Oy - Subject to change without prior notice - Page 1/3



PRODUCT DATASHEET Boom series

last update 27/9/2012

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET Boom series

last update 27/9/2012


GENERAL INFORMATION


- Product series especially designed & optimized for MC-E series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (short term 100 degrees of Celcius / 212 degrees of Fahrenheit).
- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: http://www.ledil.com/datasheets/DataSheet_TAPE.pdf
- NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit boar weaken the strength of the tape.
- NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.

If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.


Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

Relative intensity of CA12957_BOOM-MC-XW (Cree MC-E)

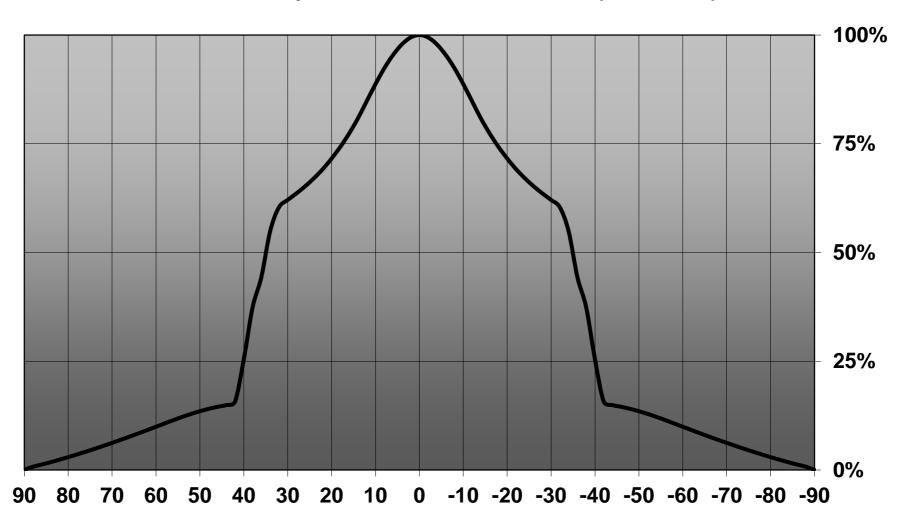


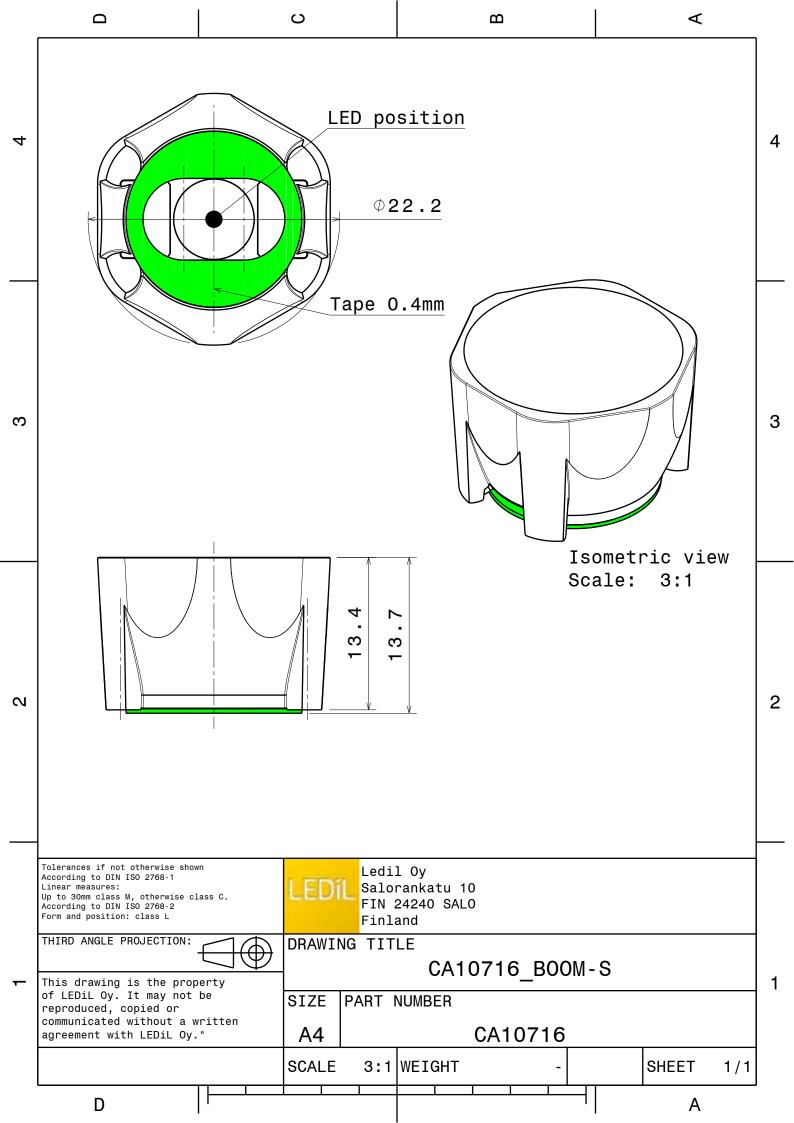


Luminaire: Ledil Oy CA10716_Boom-MC-S CA10716_Boom-MC-S Lamps: 1 \times Cree MC-E (white)

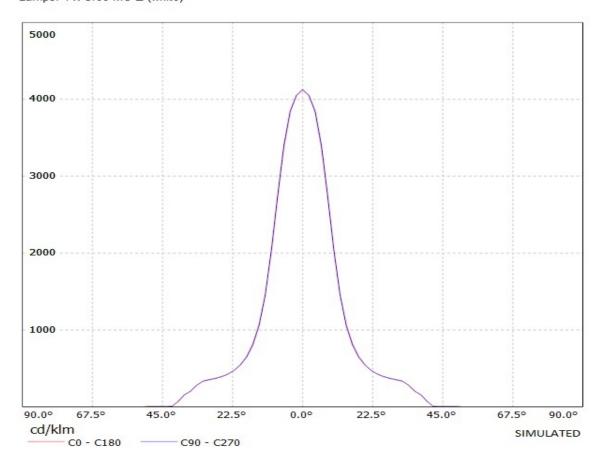

Luminaire: Ledil Oy CA10928_Boom-MC-M CA10928_Boom-MC-M Lamps: 1 x Cree MC-E (white)

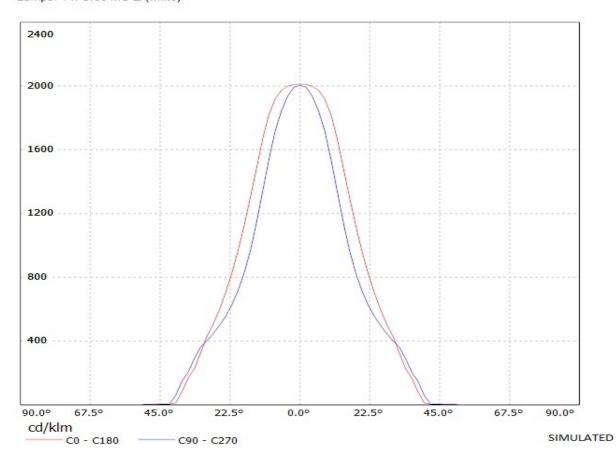


Luminaire: Ledil Oy CA10929_Boom-MC-W CA10929_Boom-MC-W Lamps: 1 x Cree MC-E (white)

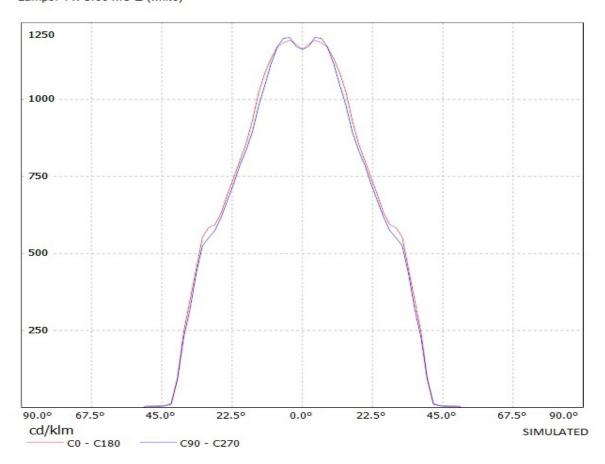


Luminaire: Ledil Oy CA10716_Boom-MC-S CA10716_Boom-MC-S

Lamps: 1 x Cree MC-E (white)

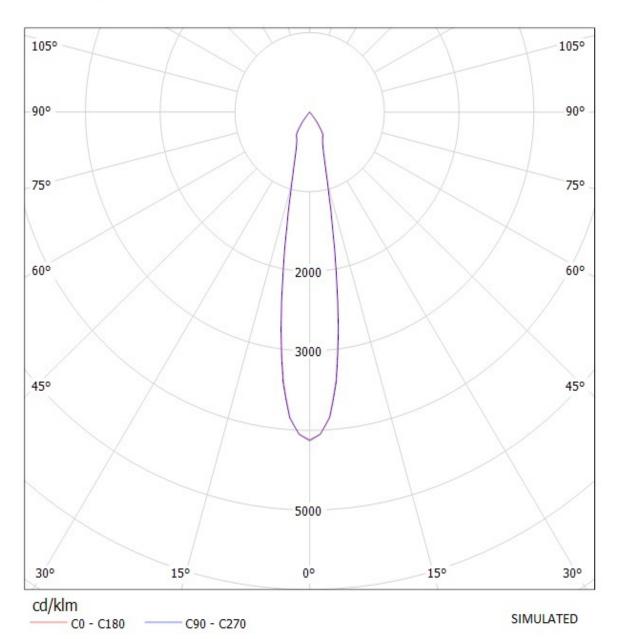

Luminaire: Ledil Oy CA10928_Boom-MC-M CA10928_Boom-MC-M

Lamps: 1 x Cree MC-E (white)

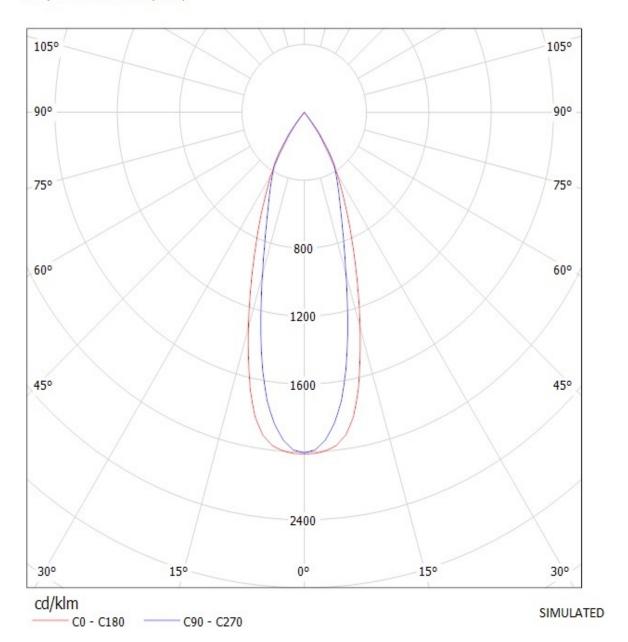

Luminaire: Ledil Oy CA10929_Boom-MC-W CA10929_Boom-MC-W Lamps: 1 x Cree MC-E (white)

